


Startelektronik für einstellbare Startadresse

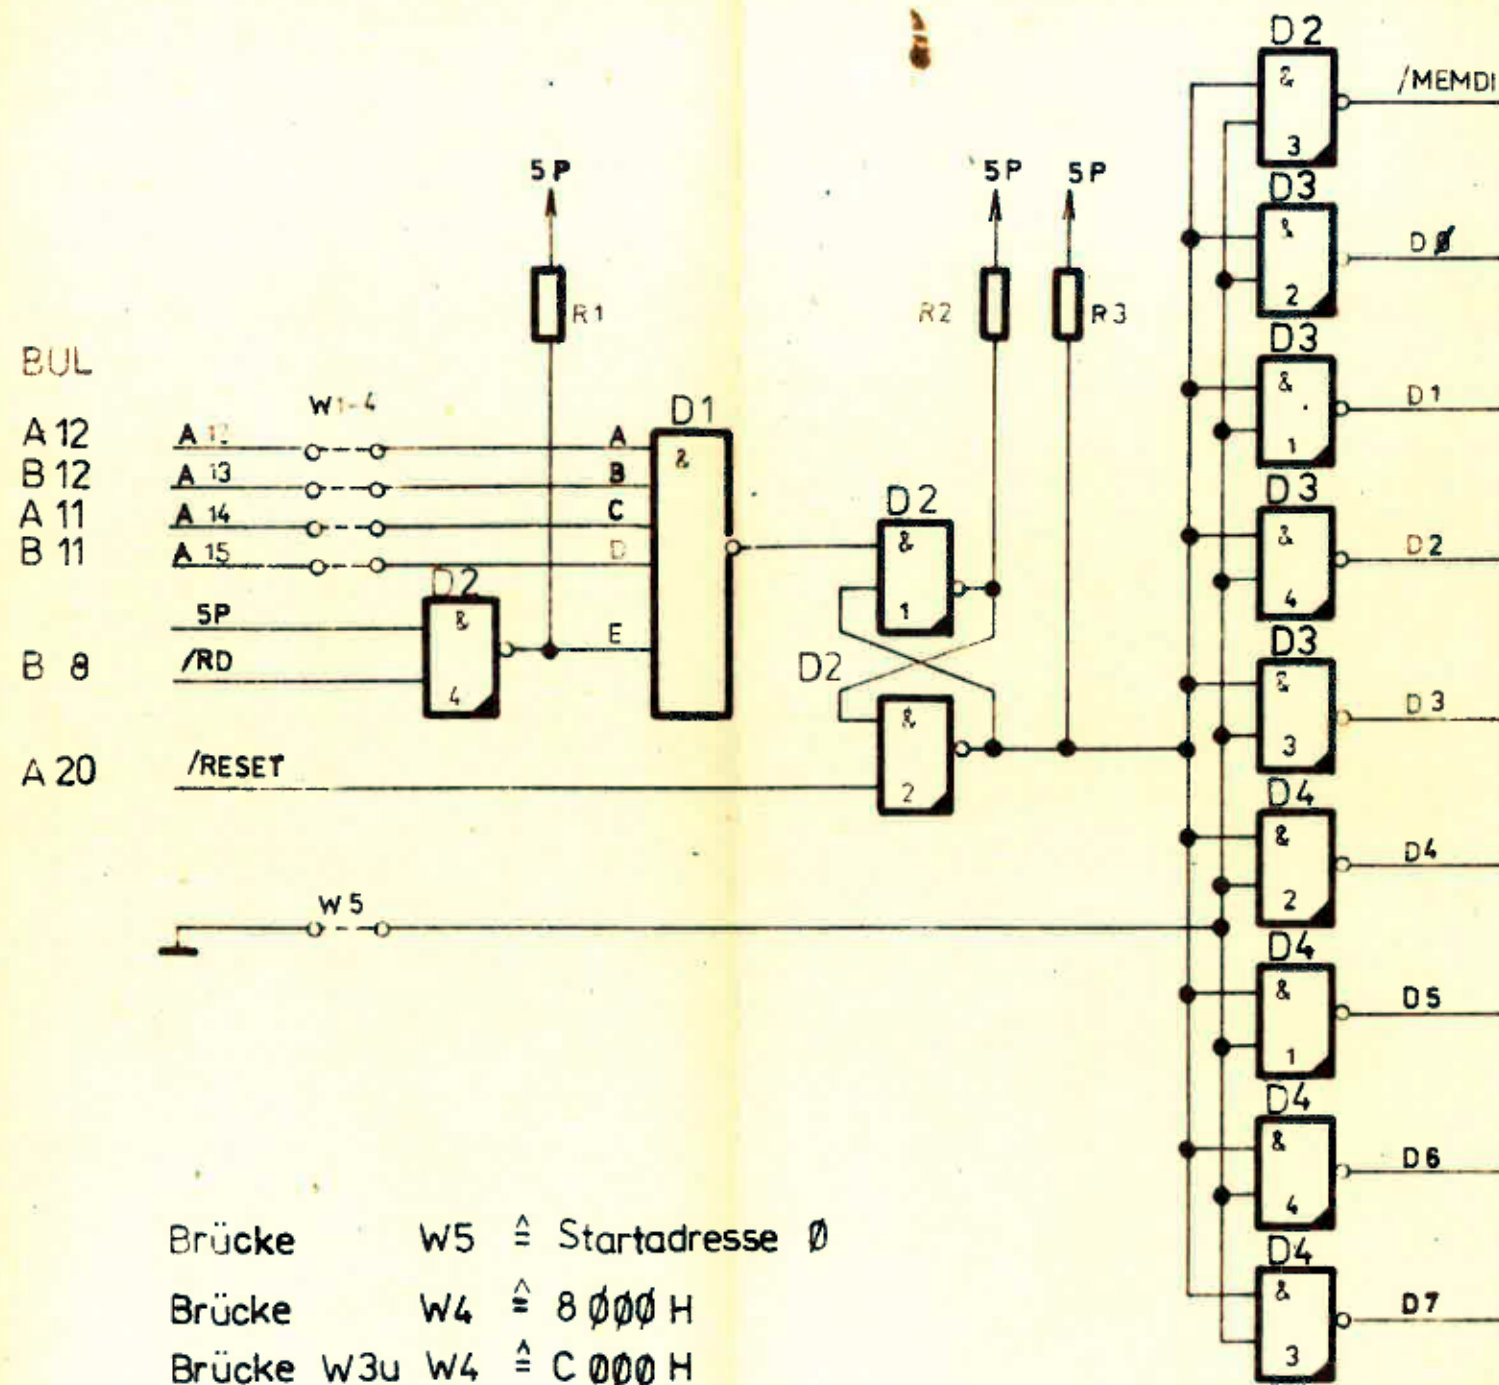

Systembus K 1520

BUL

B 9

B 7

A 7

B 6

A 6

B 5

A 5

B 4

A 4

BUL A	1	00	BUL B	1	00
	2	00		2	00
	3	5 PG		3	5 PG
	4	DB 7		4	DB 6
	5	DB 5		5	DB 4
	6	DB 3		6	DB 2
	7	DB 1		7	DB 0
	8	/WR		8	/RD
	9	/MREQ		9	/MEMDI
	10	/EO		10	/IE 1
	11	AB 14		11	AB 15
	12	AB 12		12	AB 13
	13	AB 10		13	AB 11
	14	AB 8		14	AB 9
	15	5 N		15	5 N
	16	AB 6		16	AB 7
	17	AB 4		17	AB 5
	18	AB 2		18	AB 3
	19	AB 0		19	AB 1
	20	/RESET		20	/BUSRQ
	21	/TAKT		21	00
	22	/IODI		22	00
	23	/NMI		23	/INT
	24	/WAIT		24	/IORQ
	25	/RFSH		25	/RDY
	26	/M1		26	/HALT
	27	/BA0		27	/BA1
	28	12 P		28	12 P
	29	5 P		29	5 P

AZ				Mitteilung		Datum		Name		Halbzeug/Werkstoff		zul. Abw. für Maße ohne Toleranzang.	
1985				Datum		Name		Zeichnungs-Nr.		Benennung		Maßstab	
Bearb.				6.2.86		J. Kuhn		R-233-101 / 050 Sp(3)		NANOS - Rückverdrahtung (K 1520)		1/5	
Konstr.												Masse	
Technol.												IHS	
Gez.				02.05.		A. Kuhn		Ers. für		Ers. durch		Warnemünde	
Stand.												Abt. R	